



SERIE: FOX

Descripción

Collection of LED outdoor wall lights, equipped with high performance light emitting diode. Body made of aluminum injection, diffuser in tempered glass. Protection against the penetration of solid and liquid particles. Allows its installation outdoors. Pre-wired luminaire

REF. B-803092


Colección de apliques de exterior LED, equipados con diodo emisor de luz de alto rendimiento. Cuerpo fabricado en inyección de aluminio, difusor en cristal templado. Protección contra la penetración de partículas sólidas y líquidas. Permite su instalación al aire libre. Luminaria precableada



FINISHES AVAILABLE

DARK GREY MATT BLACK

ENERGY EFFICIENCY



TECHNICAL DATA SHEET Application SURFACE **IP** Rating **IP65** Light source LED 1304 Wattage 12 W Chip Brand CREE **CCT Kelvin** 3000 / 4000 / 5000K Lumen 800Lm±10% IF-VF 320 mA-27-40VDC C.R.I ≥ 80 SDCM ≤ 5 IK 08 64° 360° **Beam Angle** Input Voltage - Frequency 100-240V~ 50/60Hz **Electrical Classification** L 25000h. L70B50 Lifespan Driver Inside - Included Power Factor: 0.9 **Power Efficiency** 83% 130 x 90 x 220 mm. Measure mm Working humidity 10%~90%RH Weight Kg. 1 Working humidity -30°~+45° Lighting distance 6m Certificates - Standard CE - IEC 60598-1/IEC 62031 Warranty years 3 **MATERIALES / ACABADOS** Structure material High quality aluminum **Diffuser Materilal** Glass Structure finishing Anti - UV powder coating finish **Diffuser finishing** Clear


IBERLAMP reserves the right to carry out the appropriate technical modifications in order to improve the performance of the product.


We recommend consulting with the sales team to clarify any doubts.



Photometric Results


CIE Class:	Direct
Total Rated Lamp Lumens:	800 lm.
Measurement Flux:	800 lm.
Efficiency:	65.1 %
Downward Ratio:	32.5 %
Upward Ratio:	32.5 %
Luminaire Efficiency Rating (LER):	66.7 %
Central Intensity:	474.5 cd.
Max. Intensity:	474.5 cd.
Pos. Of Max Intensity:	H2.0 V-180.0
IES File Name	B-803092

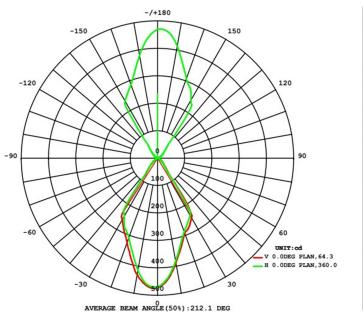



The results shown correspond to the production standards. Any modification of these standards may alter the results displayed.





IBERLAMP reserves the right to make the necessary technical modifications in order to improve the performance of the product.

We recommend consulting with the commercial team to answer any questions.