





Descripción

Collection of LED outdoor wall lights, equipped with high performance light emitting diode. Body made of aluminum injection, diffuser in Tempered Glass. Protection against the penetration of solid and liquid particles. Allows its installation outdoors. Pre-wired luminaire


Colección de apliques de exterior LED, equipados con diodo emisor de luz de alto rendimiento. Cuerpo fabricado en inyección de aluminio, difusor en Vidrio Templado. Protección contra la penetración de partículas sólidas y líquidas. Permite su instalación al aire libre. Luminaria precableada



FINISHES AVAILABLE

DARK GREY MATT BLACK

ENERGY EFFICIENCY



TECHNICAL DATA SHEET

Application	SURFACE
IP Rating	IP65
Light source	LED 1304
Wattage	8 W
Chip Brand	CREE
CCT Kelvin	3000 / 4000 / 5000K
Lumen	600
IF—VF	200 mA \sim 27-40VDC
C.R.I	≥ 80
SDCM	≤ 5
IK	08
Beam Angle	31 °
Input Voltage—Frequency	100-240V \sim 50/60Hz
Electrical Classification	I
Lifespan	25000h. L70B50
Driver	Inside—Included
Power Factor:	0.9
Power Efficiency	84%
Measure mm	145 x 100 x 96 mm.
Working humidity	10%~90%RH
Weight Kg.	0.5
Working humidity	-30°∼+45°
Lighting distance	8 m
Certificates - Standard	CE - IEC 60598-1/IEC 62031
Warranty years	3
MATERIALES / ACABADOS	
Structure material	High quality aluminum
Diffuser Materilal	Glass
Structure finishing	Anti - UV powder coating finish

IBERLAMP reserves the right to carry out the appropriate technical modifications in order to improve the performance of the product.
We recommend consulting with the sales team to clarify any doubts.


Clear glass

Diffuser finishing



Photometric Results

CIE Class:	Direct
Total Rated Lamp Lumens:	600 lm.
Measurement Flux:	600 lm.
Efficiency:	58.0%
Downward Ratio:	58.0%
Upward Ratio:	0.0%
Luminaire Efficiency Rating (LER):	75
Central Intensity:	727.7 cd.
Max. Intensity:	727.7 cd.
Pos. Of Max Intensity:	H0.0 V-22.0
IES File Name	B-003338

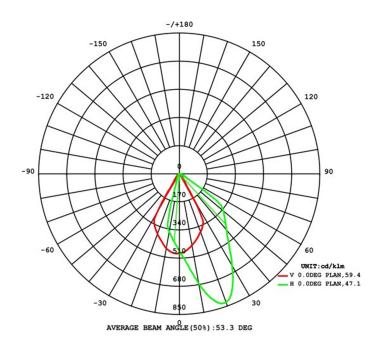



IBERLAMP reserves the right to make the necessary technical modifications in order to improve the performance of the product.

We recommend consulting with the commercial team to answer any questions.