



SERIE: VALLE

REF. Q-003868+B

Descripción

Collection of LED outdoor step lights, equipped with high performance light emitting diode. Body made of aluminum injection, diffuser in PC opal. Protection against the penetration of solid and liquid particles. Allows its installation outdoors. Pre-wired luminaire

Colección de empotrables de exterior LED, equipados con diodo emisor de luz de alto rendimiento. Cuerpo fabricado en inyección de aluminio, difusor en PC opal. Protección contra la penetración de partículas sólidas y líquidas. Permite su instalación al aire libre. Luminaria precableada




FINISHES AVAILABLE

DARK GREY

MATT BLACK

ENERGY EFFICIENCY

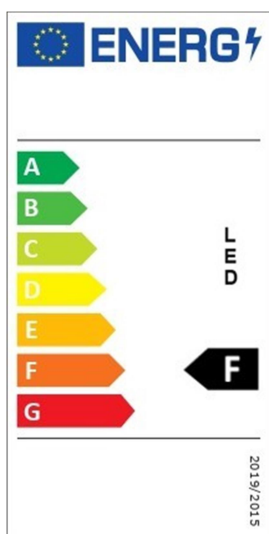

TECHNICAL DATA SHEET

Application	RECESSED
IP Rating	IP65
Light source	LED 2835
Wattage	6W
Chip Brand	OSRAM
CCT Kelvin	3000 / 4000 / 5700K
Lumen	150
IF—VF	150 mA—27-42V
C.R.I	≥ 80
SDCM	≤ 5
IK	08
Beam Angle	113°
Input Voltage—Frequency	100-240V~ 50/60Hz
Electrical Classification	I
Lifespan	25000h. L70B50
Driver	Inside—Included
Power Factor:	≥0.45
Power Efficiency	81%
Measure mm	170 x 90 x 75 mm
Working humidity	10%~90%RH
Weight Kg.	0.64
Working humidity	-30°~+45°
Lighting distance	2 m
Certificates - Standard	CE - IEC 60598-1/IEC 62031
Warranty years	5



MATERIALES / ACABADOS

Structure material	High quality aluminum
Diffuser Material	PC
Structure finishing	Anti - UV powder coating finish
Diffuser finishing	Opal White

IBERLAMP reserves the right to carry out the appropriate technical modifications in order to improve the performance of the product.
We recommend consulting with the sales team to clarify any doubts.


Photometric Results

CIE Class:	Direct
Total Rated Lamp Lumens:	150 lm
Measurement Flux:	150 lm
Efficiency:	17.9 %
Downward Ratio:	0%
Upward Ratio:	17.9%
Luminaire Efficiency Rating (LER):	24.12
Central Intensity:	154 cd
Max. Intensity:	154 cd
Pos. Of Max Intensity:	H63.0 V0.0
IES File Name	Q-003868+B

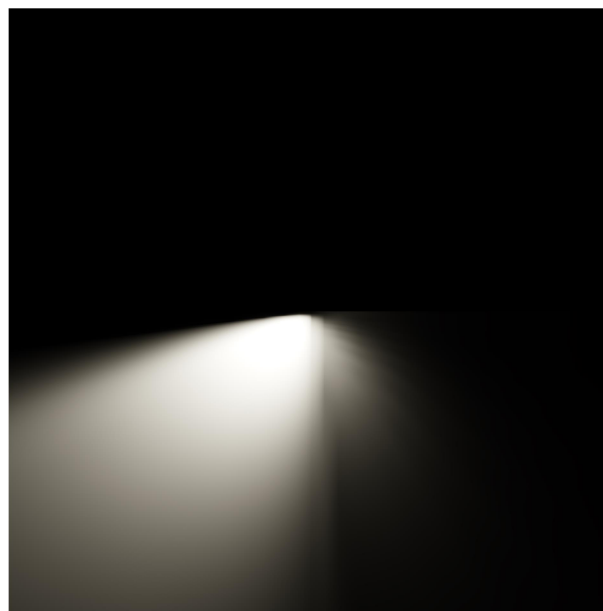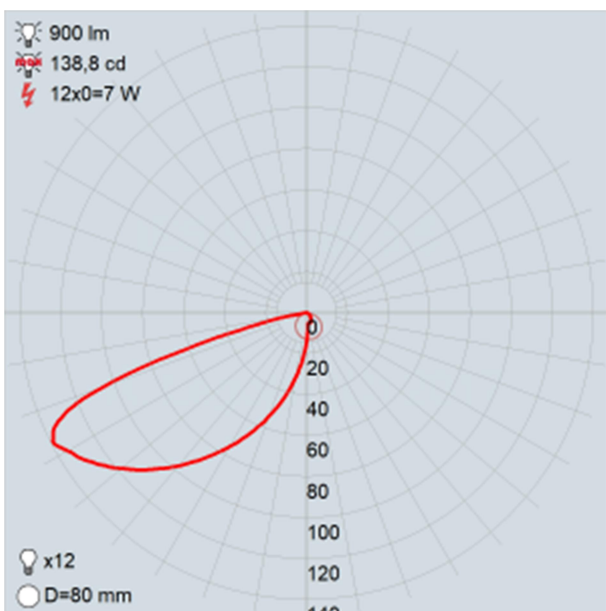



IBERLAMP

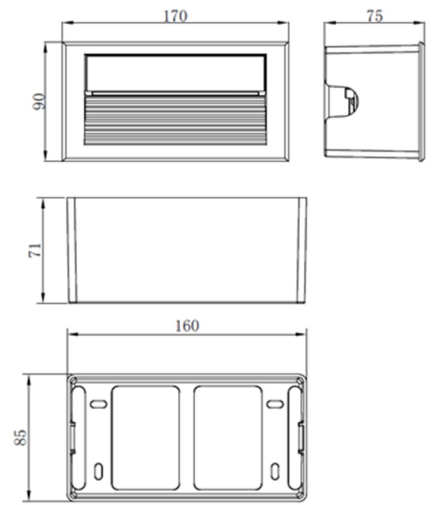

IBERLAMP reserves the right to make the necessary technical modifications in order to improve the performance of the product.

We recommend consulting with the commercial team to answer any questions.